

Submittal WHP24WMA21S

24,000 BTU Wall Mount

Job Name _____
Location _____
Engineer _____
Submitted To _____
Submitted By _____
Reference _____

Date _____
Approval _____
Construction _____
Unit No _____
Drawing No _____

FEATURES

- Auto restart
- Quiet mode
- °C & °F convertible
- 24 Hour Timer
- Horizontal Auto Swing Louver



SYSTEM COMPONENTS

Indoor Unit Model Number	WHP24WMA21S
Nominal Capacity	24,000

INDOOR TEMPERATURE SETTING RANGE

Cooling, - °F (°C)	61°F to 86°F (16°C to 30°C)
Heating, - °F (°C)	61°F to 86°F (16°C to 30°C)

LINESET REQUIREMENTS

Connection Pipe Diameter - Liquid (Flare) - in (mm)	3/8 (9.52)
Connection Pipe Diameter - Gas (Flare) - in (mm)	5/8 (15.88)

WARRANTY



NET DIMENSIONS & WEIGHTS

Indoor Unit Net Dimensions (W x H x D) - in	44 8/16 x 12 6/16 x 9 5/16
Indoor Unit Net Dimensions (W x H x D) - mm	1130 x 315 x 237
Indoor Unit Gross Dimensions (W x H x D) - in	47 10/16 x 15 6/16 x 12 7/16
Indoor Unit Gross Dimensions (W x H x D) - mm	1210 x 390 x 316
Indoor Unit - Net Weight - lbs (kg)	32 (14.5)
Indoor Unit - Gross Weight - lbs (kg)	37 (17)

SOUND PRESSURE

Sound Pressure Level Indoor (S/H/M/L/Q) - dB(A)	50/47/42/36/33
---	----------------

FAN DATA

Indoor Airflow Rate (S/H/M/L/Q) - CFM	706/647/559/441/368
Indoor Airflow Rate (S/H/M/L/Q), - m³/h	1200/1100/950/750/625

ETL: 3088177

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB.
 Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB.
 Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – Indoor unit).





Submittal WHP24WMA21S

24,000 BTU Wall Mount

DIMENSIONS

Unit: In. (mm)

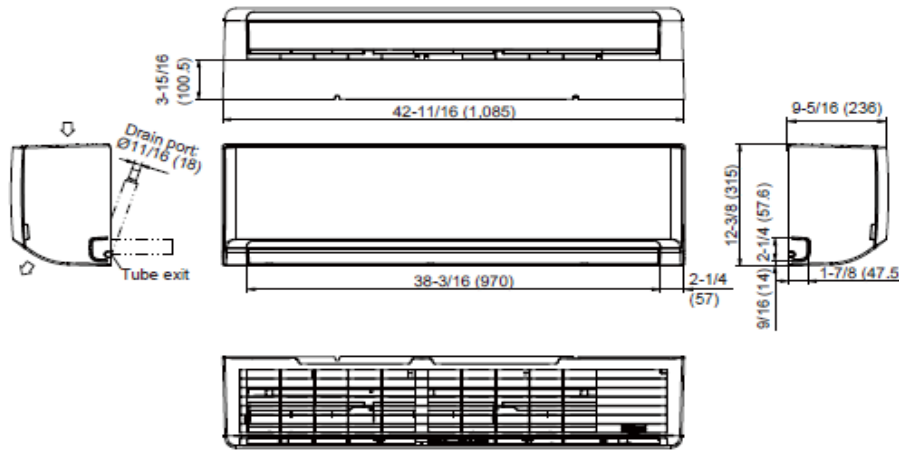

 and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. Used under license by FUJITSU GENERAL AMERICA, INC. All Rights Reserved.