


36000 BTU Duct Type - Heat Pump

Job Name _____
Location _____
Engineer _____
Submitted To _____
Submitted By _____
Reference _____

Date _____
Approval _____
Construction _____
Unit No _____
Drawing No _____

FEATURES

Up to 0.8" WG (200 Pa)
 Heating down to -13°F (-25°C)
 3-Position AHU: Up, Right, Left
 Maximum line set length is 246 ft.
 Built-in Base Pan Heater
 Optional Auxiliary Heater Kit
 Dual Point Power Connection


SYSTEM COMPONENTS

Indoor Unit Model Number	WHM36DMA21S
Outdoor Unit Model Number	WHM36SZA21S
System model number	M36SZA2

ELECTRICAL - Outdoor Unit

Voltage/Phase/Frequency	208 / 230V, 1-Phase, 60Hz
Voltage Range - V	198 - 253
MCA - Outdoor Unit - A	23
Max Circuit Breaker - Outdoor Unit - A	35
MCA - Indoor Unit - A	4.8
Max Circuit Breaker - Indoor Unit - A	15
Rated Load Amperage (RLA) - A	16.8

CAPACITIES

Cooling Capacity - BTUh	36000
Cooling Capacity Range - BTUh	11800 - 36800
Heating Capacity - BTUh	36000
Heating Capacity Range - BTUh	8900 - 38200

FAN SPEEDS

Indoor Airflow Rate (H/M/L) - CFM	1120
Indoor Airflow Rate (H/M/L) - m ³ /h	1905
Outdoor Airflow Rate (H) - CFM	2350
Outdoor Airflow Rate (H) - m ³ /h	3995

SOUND PRESSURE

Sound Pressure Level Indoor (H)	57
Sound Pressure Level Outdoor (H) - dB(A)	57

LINESSET REQUIREMENTS

Connection Pipe Diameter - Liquid (Flare) - in (mm)	Ø3/8 (Ø9.52)
Connection Pipe Diameter - Gas (Flare) - in (mm)	Ø3/4 (Ø19.05)
Minimum Lineset Length - ft (m)	10(3.04)
Maximum Lineset Length (Total) - ft (m)	246 (75)
Max Height Difference - ft (m)	98 (30)
Pre-charged Lineset Length - ft (m)	24.6 (7.5)


STATIC PRESSURE

Static Pressure Range - inWG (Pa) 0 to 0.8 (0 to 200)

OUTDOOR TEMPERATURE OPERATING RANGE

Cooling - °F (°C) 5 to 122 (-15 to 50)
 Heating - °F (°C) -13 to 75 (-25 to 24)

INDOOR TEMPERATURE SETTING RANGE

Cooling - °F (°C) 61°F to 86°F (16°C to 30°C)
 Heating - °F (°C) 61°F to 86°F (16°C to 30°C)
 Moisture Removal pints/h (L/h) 4.6 (2.2)

EFFICIENCIES

SEER	18
EER	9.55
HSPF	11
COP - BTU/hW	11.26
COP - W/W	3.3
Energy Star	No

NET DIMENSIONS & WEIGHTS

Indoor Unit Net Dimensions (W x H x D) - in	46-1/8 x 19-5/8 x 21-5/8
Indoor Unit Net Dimensions (W x H x D) - mm	1,170 x 500 x 550
Indoor Unit Gross Dimensions (W x H x D) - in	49-5/8 x 22-1/2 x 25-3/8
Indoor Unit Gross Dimensions (W x H x D) - mm	1,260 x 570 x 645
Outdoor Unit Net Dimensions (W x H x D) - in	33 x 37-3/8 x 13-3/8
Outdoor Unit Net Dimensions (W x H x D) - mm	840 x 950 x 340
Outdoor Unit Gross Dimensions (W x H x D) - in	36-1/4 x 43-3/4 x 18-1/8
Outdoor Unit Gross Dimensions (W x H x D) - mm	920 x 1,110 x 460
Indoor Unit - Net Weight - lbs (kg)	140.0 (63.5)
Outdoor Unit - Net Weight - lbs (kg)	147.7 (67)

REFRIGERANT

Refrigerant Type	410A
Refrigerant Weight - lb oz	6 lb 3 oz
Oil type	VG74

COMPRESSOR

Compressor Type Rotary


WARRANTY


7 Year Compressor, 5 Year Parts out-of-the-box Warranty


Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).

DIMENSIONS

Unit: In. (mm)

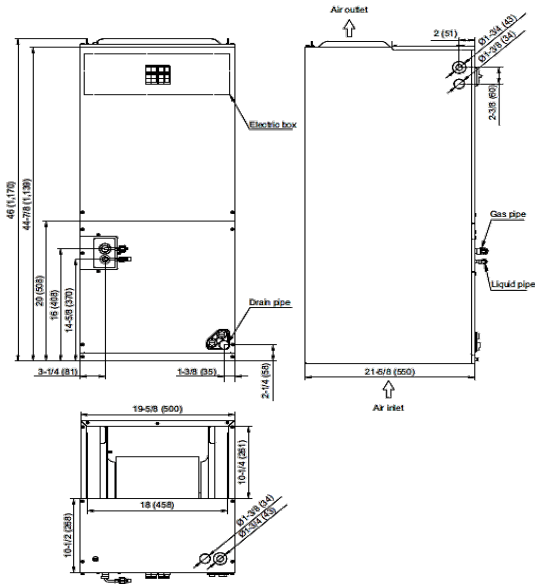

Indoor Unit Model	Heater Part No.	Description
WHM36DMA21S	21-4245-01	Electric heater kit (5 kW)
	21-4245-02	Electric heater kit (7.5 kW)
	21-4245-03	Electric heater kit (10 kW)
	21-4245-04	Electric heater kit (15 kW)
Voltage		208/230V,60Hz,1f

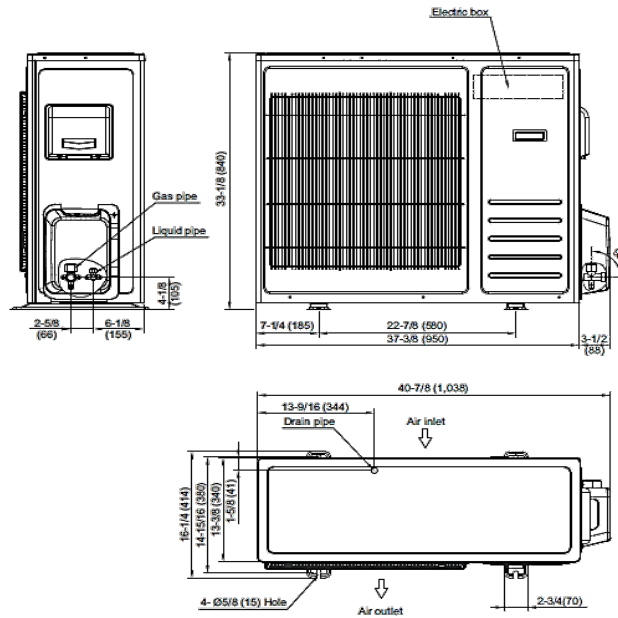

and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. Used under license by FUJITSU GENERAL AMERICA, INC. All Rights Reserved.