

Submittal U09SZA2C

9,000 BTU Cassette - Heat Pump Ductless System

Job Name _____
Location _____
Engineer _____
Submitted To _____
Submitted By _____
Reference _____

Date _____
Approval _____
Construction _____
Unit No _____
Drawing No _____

FEATURES

- Wireless Remote Controller Included
- Included Smart Mode
- Super Mode
- Auto restart
- Quiet mode
- °C & °F convertible
- 24 Hour Timer
- 8°C Heat Mode
- Washable Filter
- Automatic Swing Louver
- Cold Air Prevention


SYSTEM COMPONENTS

Indoor Unit Model Number	WHU09CTA21S
Outdoor Unit Model Number	WHU09SZA21S
System model number	U09SZA2C

ELECTRICAL

Voltage/Phase/Frequency	208 / 230V, 1-Phase, 60Hz
Voltage Range - V	198 - 253
MCA - A	7.3
Max Circuit Breaker - A	15
Max. Current (Cooling) - A	15
Max. Current (Heating) - A	15
Rated Current (Cooling) - A	3.6
Rated Current (Heating) - A	3.5
Rated Input Power (Cooling) - W	700
Min - Max Input Power (Cooling) - W	332 - 941
Rated Input Power (Heating) - W	709
Min - Max Input Power (Heating) - W	221 - 1022

CAPACITIES

Cooling Capacity - BTUh	9000
Cooling Capacity Range - BTUh	4850 - 11600
Heating Capacity - BTUh	10000
Heating Capacity Range - BTUh	4340 - 12280

FAN SPEEDS

Indoor Airflow Rate (H/M/L) - CFM	309/274/232
Indoor Airflow Rate (H/M/L) - m³/h	520/460/390
Outdoor Airflow Rate (H) - CFM	1355
Outdoor Airflow Rate (H) - m³/h	2300

SOUND PRESSURE

Sound Pressure Level Indoor (H/M/L) - dB(A)	38/34/31- Cooling & Heating
Sound Pressure Level Outdoor (H) - dB(A)	52

LINESET REQUIREMENTS

Connection Pipe Diameter - Liquid (Flare) - in (mm)	Ø1/4 (Ø6.35)
Connection Pipe Diameter - Gas (Flare) - in (mm)	Ø3/8 (Ø9.52)
Minimum Lineset Length - ft (m)	10 (3.04)
Maximum Lineset Length (Total) - ft (m)	82 (25)
Max Height Difference (IDU higher than ODU) - ft (m)	33 (10)
Max Height Difference (ODU higher than IDU) - ft (m)	33 (10)
Pre-charged Lineset Length - ft (m)	24.6 (7.5)

WARRANTY


7 Year Compressor, 5 Year Parts Warranty

OUTDOOR TEMPERATURE OPERATING RANGE

Cooling - °F (°C)	5°F to 118°F (-15°C to 48°C)
Heating - °F (°C)	-4°F to 75°F (-20°C to 24°C)

INDOOR TEMPERATURE SETTING RANGE

Cooling - °F (°C)	61°F to 86°F (16°C to 30°C)
Heating - °F (°C)	61°F to 86°F (16°C to 30°C)
Mositure Removal pints/h (L/h)	1.7 (0.8)

EFFICIENCIES

SEER	22	SEER2	20.5
EER	12.86	EER2	12.85
HSPF	10	HSPF2	10
COP - BTU/hW	14.11	COP2- BTU/hW	12.50
COP - W/W	4.13	COP.2 - W/W	3.66
Energy Star	No		

NET DIMENSIONS & WEIGHTS

Indoor Unit Net Dimensions (H x W x D) - in	8 1/2 x 22 1/2 x 22 1/2
Indoor Unit Net Dimensions (H x W x D) - mm	215 x 570 x 570
Indoor Unit Gross Dimensions (H x W x D) - in	4 1/2 x 26 3/4 x 27 1/8
Indoor Unit Gross Dimensions (H x W x D) - mm	292 x 668 x 730
Outdoor Unit Net Dimensions (H x W x D) - in	22 7/8 x 31 7/8 x 11
Outdoor Unit Net Dimensions (H x W x D) - mm	580 x 810 x 280
Outdoor Unit Gross Dimensions (H x W x D) - in	25 1/4 x 37 x 16 1/2
Outdoor Unit Gross Dimensions (H x W x D) - mm	640 x 940 x 420
Indoor Unit - Net Weight - lbs (kg)	32 (14.5)
Outdoor Unit - Net Weight - lbs (kg)	75 (34)

REFRIGERANT

Refrigerant Type	R410A
Refrigerant Weight - lb oz	2 lb 2 oz
Oil type	VG74

COMPRESSOR

Compressor Type	Rotary
-----------------	--------

ACCESSORIES


VVWRCU	Wired Remote Controller
FJ-IR-WIFI-1NA	Intesis IR WiFi Module
BP101WA	Cielo Breez Plus
WH-AG4CT1	Cassette Grille



Note: Specifications are subject to change without notice. Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).

DIMENSIONS

Unit: In. (mm)

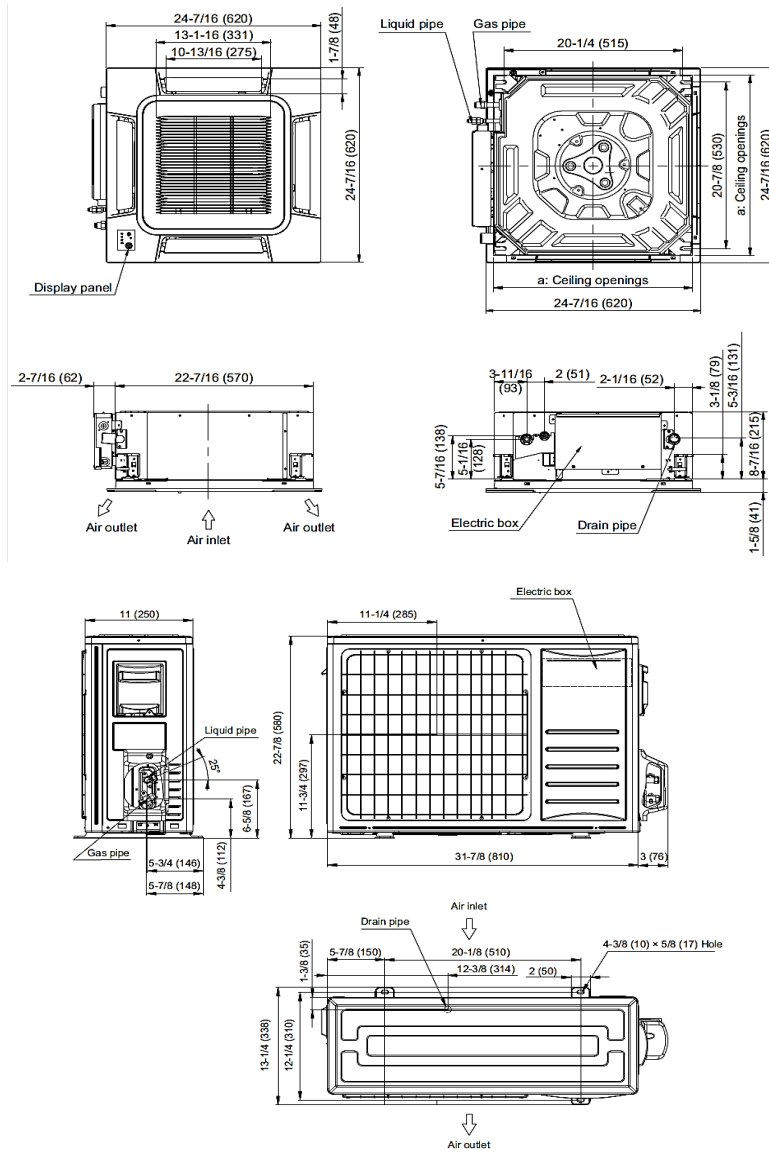

and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. All Rights Reserved.